

DATA SHEET

MDV Series

MDV120, MDV160

Multi-purpose compact DC/DC converters



Description

Compact isolated DC/DC converters of MDV Series for industrial and special purpose applications. Despite the small size (107×67,7×12,85 mm) the maximum output power of modules reach up to 160 W and they are able to operate in a wide case operating temperature range (–60...+125°C). These modules might have single galvanically isolated output, remote on/off, short circuit, overcurrent and thermal protection and can operate in parallel and series modes. Without optocouplers in the converter's circuit it can safely operate in conditions of ionizing radiation and high temperature. Power supplies have variable protections from different factors: vibration, dirt, moisture fog and salt fog.

These modules undergo special thermal and limit test including burn-in test with extreme on/off modes.

Compliance

- MIL-STD-810G
- MIL-STD-461F (CE102)
- MIL-STD-704E



Description of MDV Series on the manufacturer's website
eng.aedon.ru/catalog/dcdc/series/22

Features

- 5 year warranty
- Output current up to 30 A
- 28 VDC (index "V") input compliant with MIL-STD-704E
- Low-profile design (12,85 mm) with cylindrical pin outs
- Case operating temperature –60...+125°C
- 125 °C baseplate operation without derating
- Magnetic feedback without optocouplers
- Short circuit protection, overvoltage, thermal protection
- Remote on/off
- Output voltage adjustment
- Typical efficiency 87% (Uout.=24 VDC)
- Polymer potting sealing

Order registration

+7 473 200 87 80, Global Operations Team

Technical support

techsup@aedon.ru


Reliability test

eng.aedon.ru/downloads/documentation/Reliability-Test_ENG.pdf

3D models

[www.aedon.ru/content/catalog/docs/204/MDM120\(160\)V.zip](http://www.aedon.ru/content/catalog/docs/204/MDM120(160)V.zip)

Ordering information

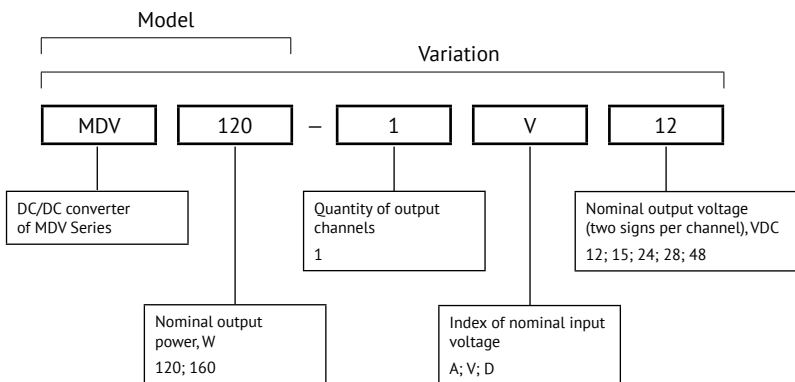

For more information please contact
 our Global Operations Team

+7 473 200 87 80
info@npo-enel.ru

Output power and current

Output power, W	120					160				
	Output voltage, VDC	12	15	24	28	48	12	15	24	28
Maximal output current, A	10	8	5	4,3	2,5	13,3	10,6	6,7	5,7	3,3

Other output voltage within range 3...70 VDC is also available upon special request.

Index of nominal input voltage*

Parameter	Index "A"	Index "V"	Index "D"
Nominal input voltage, VDC	12	28	48
Input voltage range, VDC	10,5...18	17...36	36...75
Transient deviation (1 s), VDC	–	17...80	36...84
Typical efficiency for Uout.=24 VDC	87%	87%	87%

* Reflected input ripple current (10–10000 Hz) – 8% Uin. nom

Specifications

All specifications valid for normal climatic conditions (ambient temp. 15...35°C; relative humidity 45...80%; air pressure 8,6×10⁴...10,6×10⁴ Pa), U_{in}. nom, I_{out}. nom, unless otherwise stated. It is important to note that the information herein is not full.

Output specifications

Parameter		Value
Output voltage adjustment of single channel models		±5% U _{out} . nom
Regulation	Input voltage variation (U _{min} ...U _{max})	max ±2% U _{out} . nom
	Load variation (10...100% I _{max})	
	Total regulation	±6% U _{out} . nom
Ripple and noise (p-p)		<2% U _{out} . nom
Maximum capacitive load	5 VDC	10000 µF
	12 VDC	600 µF
	24 VDC	100 µF
	48 VDC	50 µF
Start up time (remote)		max 0,1 s
Overload protection level*	120 W	<3 P _{max}
	160 W	<2,2 P _{max}
Short circuit protection*		hiccup auto recovery
Overvoltage protection		1,5 U _{nom}

* Parameters are stated for the information purposes and could not be used at long term work, exceeding maximum output current, at work outside of a range of operating temperatures.

General specifications

Parameter		Value
Case temperature	Operating (natural convection) – power derating (natural convection) – without power derating with heatsink	–60...+125°C see power derating diagram (dashed, dash-dotted curve) see power derating diagram (solid curve)
	Storage	–60...+125°C
Switching frequency		130 kHz ±10%
Isolation capacitance	input/output	1500 pF
Isolation voltage (60 s)	input/output, input/case, output/case	500 VAC, 50 Hz
Isolation resistance @ 500 VDC	input/output, input/case, output/case	20 MOhm min, normal climatic conditions
Thermal impedance		3,3°C/W
Thermal protection level		118...125°C, clamp, auto recovery
Remote on/off		Off.: connection of pins "ON" and "–IN", I _l ≤5 mA
Vibration and dust proof, salt fog resistant		+
Moisture proof (T _{amb} .=25°C)		98%
Typical MTBF		1 737 900 hrs
Failure rate		<0,05%
Warranty		5 years

Specifications (cont.)

Physical specifications

Parameter	Value
Case material	aluminium
Potting	epoxy polimer
Pin material	phosphor bronze, SnPb plated
Weight	max 184 g
Soldering temperature	260°C @ 5 s

Design topology

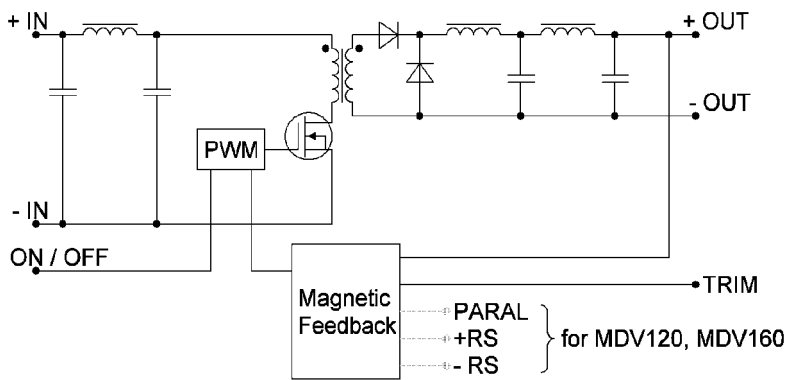


Figure 1. Design topology.

Service functions

Typical connection

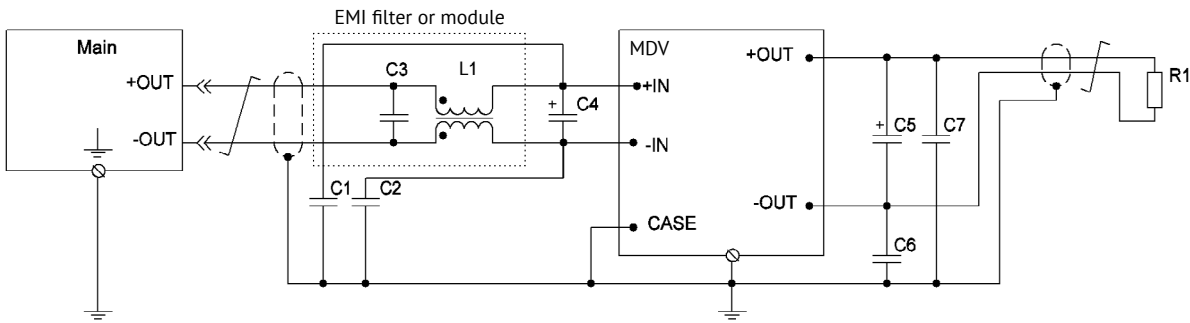


Figure 2. Typical connection with filtration unit.

C1, C2, C6, C7		ceramic capacitor		100...4700 pF 500 VDC min
C4		tantalum capacitor	Input voltage	12 VDC 470–680 uF 28 VDC 150–220 uF 48 VDC 33–47 uF
C5		tantalum capacitor	Output voltage	12 VDC 150 uF 24 VDC 30 uF 48 VDC 13 uF
EMI Filter	L1	common mode choke		0,7 mH
	C3	ceramic capacitor	Input voltage	12 VDC 470–680 uF 28 VDC 150–220 uF 48 VDC 33–47 uF
EMI Module	M series	Double Pi filter EMI module. See datasheet M Series	Maximum current up to 20 A, overvoltage and surge protection, loss insertion up to 60 db	

Service functions (cont.)

Remote control

Function of remote control by a signal allows to control the unit's operation using mechanical relay or electric switch of "open collector" type.

The unit should be powered off by connecting "ON" output to "-IN" output. The switch can carry current of up to 5 mA, the max voltage drop on the switch should be less than 1,1 V.

The unit is powered on by disconnecting the switch within the time less then 5 μ s. Being disconnected the switch is applied by approximately 5 V, allowable current leakage through the switch should not be over 50 μ A.

To arrange remote power off/on of several units simultaneously it is not allowed to use additional elements in the circuit to connect outputs "ON" and "-IN" and a switch.

If the function of remote power off/on is not used, "ON" output is allowed to be left unconnected.

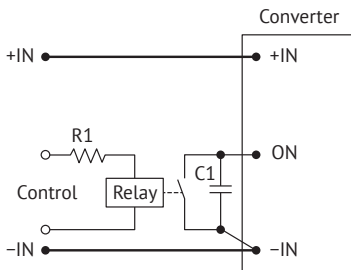


Figure 3 (a). ON/OFF control by relay.

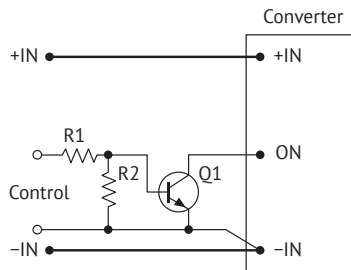


Figure 3 (b). ON/OFF control by bipolar transistor.

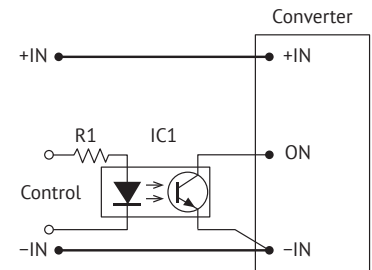


Figure 3 (c). ON/OFF control by optocoupler.

Adjustment

Adjustment of output voltage of a power supply unit within the range of at least $\pm 5\%$ can be done by connecting "ADJ" output (if available) through "-OUT" output to increase output voltage, or through "+OUT" output to decrease the output voltage.

In case of using variable resistor Rvar and outside resistors (R1, R2) it is possible to fulfill the adjustment both to increase and decrease the output voltage.

If you need to control the output voltage of a power supply unit by a signal from external source of current or voltage, e.g. in micro-controller automated control systems using DAC, the external current or voltage signal should be supplied to the adjustment output relating to "-OUT" output, as shown in the drawings (e) and (d).




Figure 4 (a). Output voltage increase.




Figure 4 (b). Output voltage decrease.




Figure 4 (c). Adjustment by resistive divider.




Figure 4 (e). Adjustment by current source.




Figure 4 (d). Adjustment by voltage source.

Efficiency

VS load

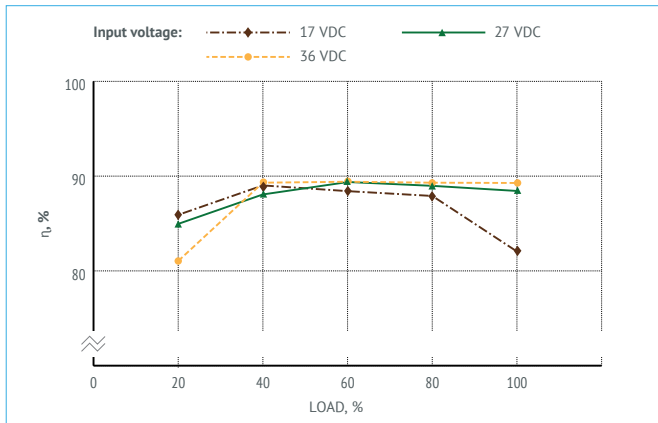


Figure 5. Efficiency of MDV160-1V27.

Power derating

VS ambient temperature and baseplate temperature

The PSU is able to operate with 100% load within the complete range of case operating temperature (-60...+125 °C). On condition the case temperature is kept from -60°C to 125 °C the PSU will operate without derating regardless of the ambient temperature. Thermal Management section of the Application Notes shows the resulting heatsink area, as well as baseplate-vs-ambient thermal resistance, the min thickness of the heatsink, and the max PSU output power without heatsink.

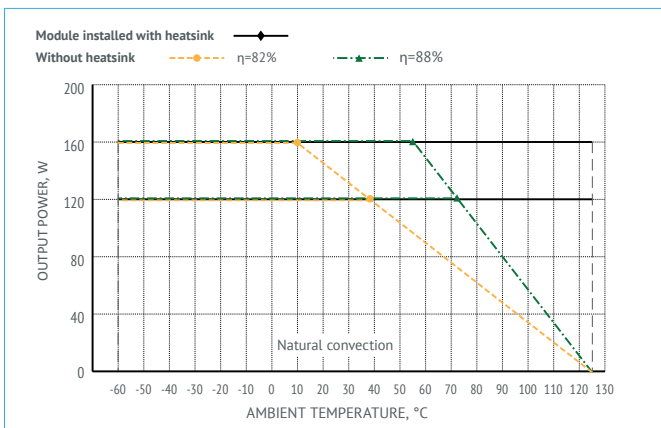


Figure 6. Power derating of MDV160-xxx.

Oscillograph charts of MDV160-xxx

Testing conditions $U_{in}=28$ VDC, $I_{out}=13.3$ A, $T_{amb}=25^{\circ}\text{C}$, $U_{out}=12$ VDC, $C_{out}=100$ μF

The database of regulated parameters of the manufactured products is available. Pls. contact your personal manager or customer support service to get necessary information.

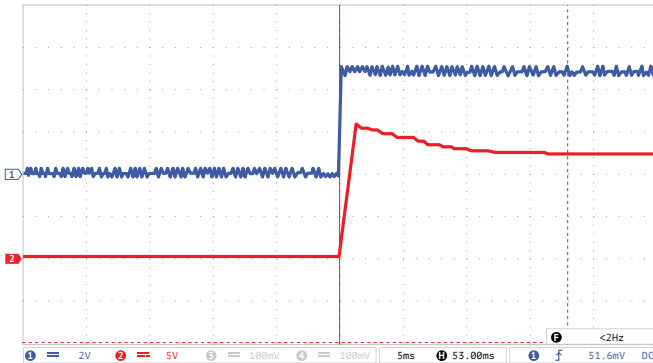


Figure 7 (a). Oscillograph chart of setting output voltage after supplying remote control signal to ON-output.

Ray 1 (blue) – voltage at ON-output. Scale 2 V/div.

Ray 2 (red) – output voltage. Scale 5 V/div.

Time scale $t=5$ ms/div.

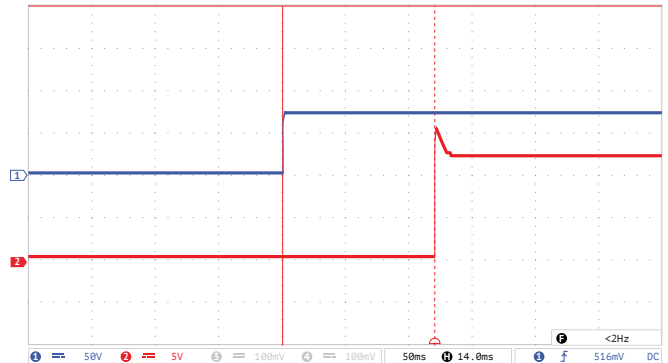


Figure 7 (b). Oscillograph chart of output voltage after supplying the input voltage.

Ray 1 (blue) – input voltage. Scale 50 V/div.

Ray 2 (red) – output voltage. Scale 5 V/div.

Time scale $t=50$ ms/div.

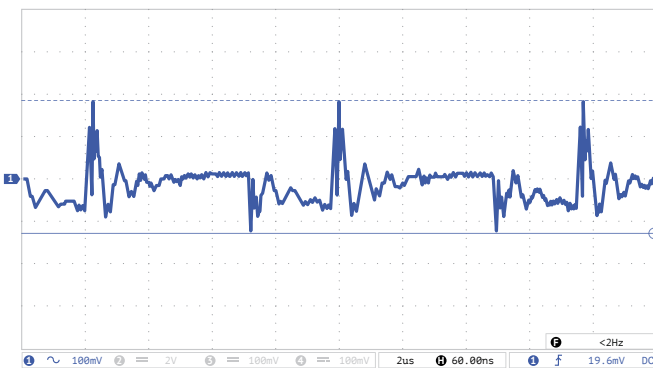


Figure 7 (c). Oscillograph chart of output voltage ripple.

Ray 1 (blue) – ripple of output voltage. Scale 100 mV/div.

Time scale 2 μs /div.

Measuring technique: see Electrical Test Screen.

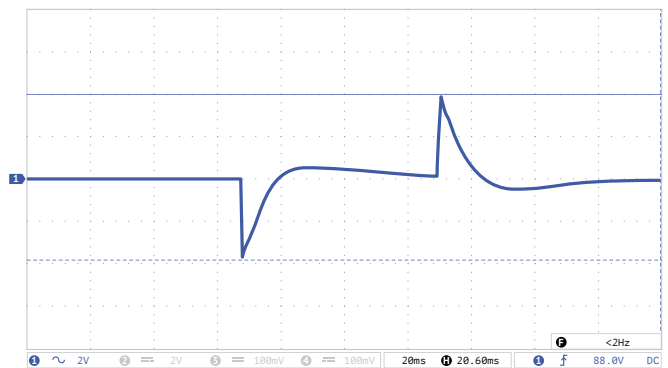


Figure 7 (d). Oscillograph chart of voltage transient deviation during load "drop/rise".

Ray 1 (blue) – output voltage. Scale 2 V/div.

Time scale $t=20$ ms/div.

Modes:

- "drop" output current variation (10...100%) I_{nom} ;
- "rise" output current variation (10...100%) I_{nom} ;
- build-up time 500 μs .

Noise spectrogram

Testing according to MIL-STD-461F CE102. (Tcase=25°C, Vin.=+12 V, full load, unless otherwise specified)

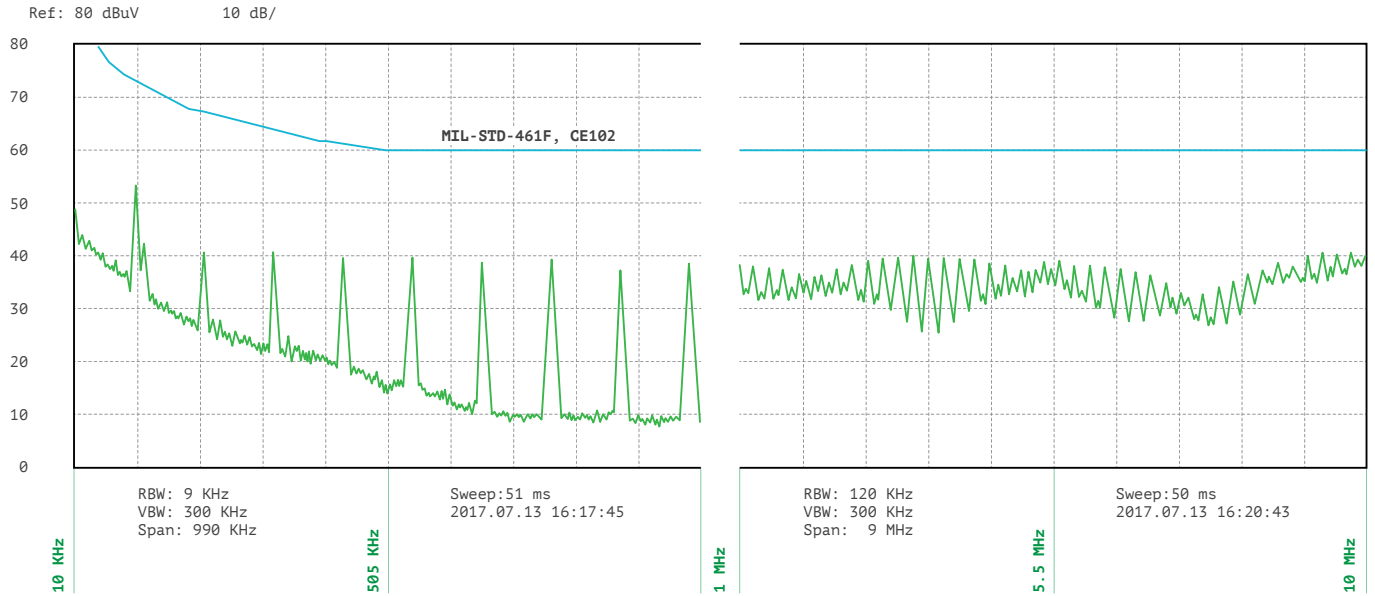


Figure 8. Spectrogram of MDV160-1V28 with typical connection diagram.

Outline dimensions

Models packed in reinforced case with flanges

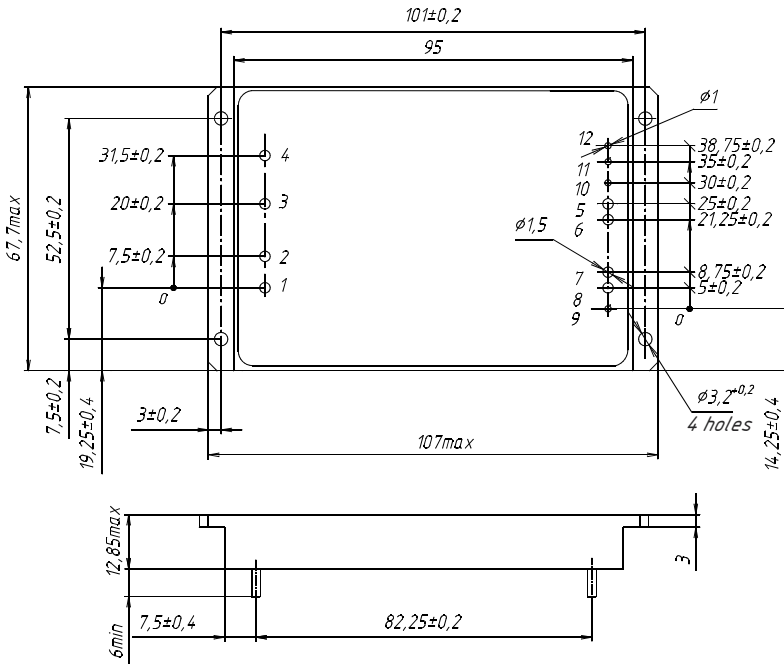


Figure 9. Single-output models.

Pin out

Pin #	1	2	3	4	5, 6	7, 8	9	10	11	12
Function	ON	-IN	+IN	CASE	-OUT	+OUT	+RS	-RS	TRIM	PARAL

Heatsink

Type	Dimensions A×B×H×D, mm	Area, cm ²	Weight, g
Longitudal ribs	107×67×14×4	358	150
Longitudal ribs	107×67×24×4	631	222

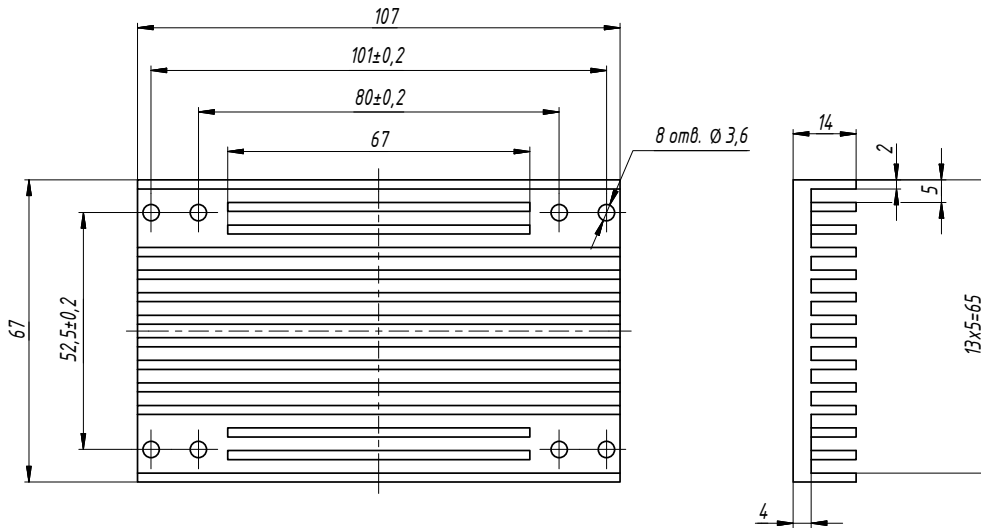


Figure 10 (a). Heatsink with longitudinal ribs H=14 mm.

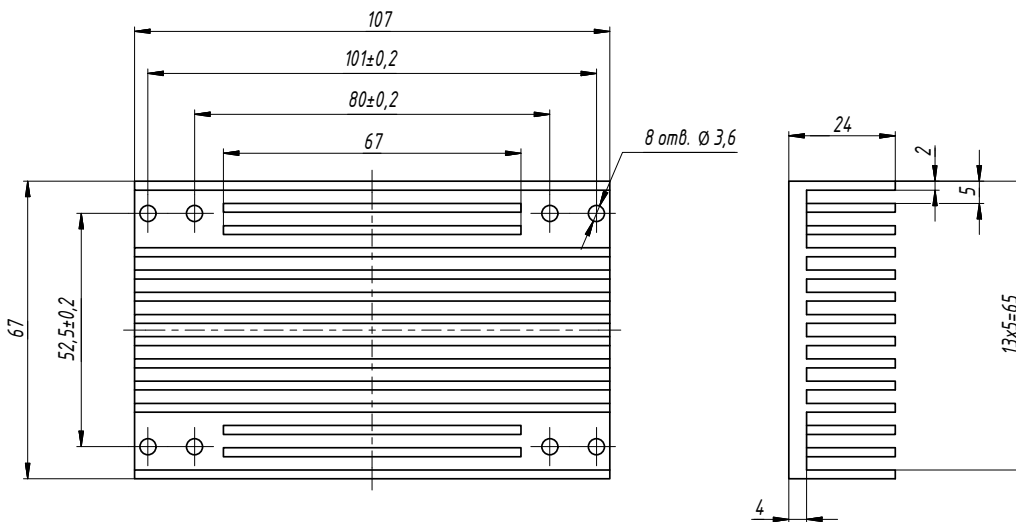


Figure 10 (b). Heatsink with longitudinal ribs H=24 mm.



eng.aedon.ru

mail@aedon.ru

AEDON, LLC is the leading Russian developer and manufacturer of DC/DC converters and power supply systems for critical applications.

5b, Druzinnikov str., Voronezh,
394026. Russia
+7 473 300-300-5

104, Mira ave., Moscow,
129626. Russia
+7 499 450-26-05 #321

This datasheet is valid for the following units: MDV120-1A12; MDV120-1A15; MDV120-1A24; MDV120-1A28; MDV120-1V12; MDV120-1V15; MDV120-1V24; MDV120-1V28; MDV120-1V48; MDV120-1D12; MDV120-1D15; MDV120-1D24; MDV120-1D28; MDV120-1D48; MDV160-1A12; MDV160-1A15; MDV160-1A24; MDV160-1A28; MDV160-1A48; MDV160-1V12; MDV160-1V15; MDV160-1V24; MDV160-1V28; MDV160-1V48; MDV160-1D12; MDV160-1D15; MDV160-1D24; MDV160-1D28; MDV160-1D48.